

## **Product overview**




**Batteries for Cars** 

## **Power DB800**



Part number Technology Flooded EAN/GTIN 3661024026246  Voltage 12 V Capacity 80 Ah CCA 640 A Length 315 mm Width 175 mm Height 190 mm Box size L04 Polarity ETN 0 Terminal Type EN taper post Hold Down B13 Weights (subject of yariation)		
EAN/GTIN 3661024026246  Voltage 12 V  Capacity 80 Ah  CCA 640 A  Length 315 mm  Width 175 mm  Height 190 mm  Box size L04  Polarity ETN 0  Terminal Type EN taper post  Hold Down B13  Weights (subject of 19.00 kg	Part number	DB800
Voltage 12 V Capacity 80 Ah CCA 640 A Length 315 mm Width 175 mm Height 190 mm Box size L04 Polarity ETN 0 Terminal Type EN taper post Hold Down B13 Weights (subject of 19.00 kg	Technology	Flooded
Capacity 80 Ah  CCA 640 A  Length 315 mm  Width 175 mm  Height 190 mm  Box size L04  Polarity ETN 0  Terminal Type EN taper post  Hold Down B13  Weights (subject of 19.00 kg	EAN/GTIN	3661024026246
CCA 640 A  Length 315 mm  Width 175 mm  Height 190 mm  Box size L04  Polarity ETN 0  Terminal Type EN taper post  Hold Down B13  Weights (subject of 19.00 kg	Voltage	12 V
Length 315 mm  Width 175 mm  Height 190 mm  Box size L04  Polarity ETN 0  Terminal Type EN taper post  Hold Down B13  Weights (subject of 19.00 kg	Capacity	80 Ah
Width 175 mm  Height 190 mm  Box size L04  Polarity ETN 0  Terminal Type EN taper post  Hold Down B13  Weights (subject of 19.00 kg	CCA	640 A
Height 190 mm  Box size L04  Polarity ETN 0  Terminal Type EN taper post  Hold Down B13  Weights (subject of 19.00 kg	Length	315 mm
Box size L04  Polarity ETN 0  Terminal Type EN taper post  Hold Down B13  Weights (subject of 19.00 kg	Width	175 mm
Polarity ETN 0  Terminal Type EN taper post  Hold Down B13  Weights (subject of 19.00 kg	Height	190 mm
Terminal Type EN taper post Hold Down B13 Weights (subject of 19.00 kg	Box size	L04
Hold Down B13 Weights (subject of 19.00 kg	Polarity	ETN 0
Weights (subject of 19.00 kg	Terminal Type	EN taper post
	Hold Down	B13
variation	Weights (subject of variation)	19.00 kg

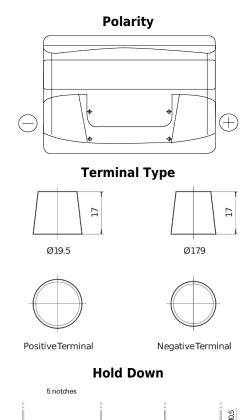

Design, features and specifications are subject to change without notice. We disclaim any representation or warranty, express or implied, concerning the data or recommendations, and in no event shall be liable for any loss or damage claimed to have arisen as a result. Some products may not be available in your local market.